


SR01

Electronic Lock

Srison



SR0100S41

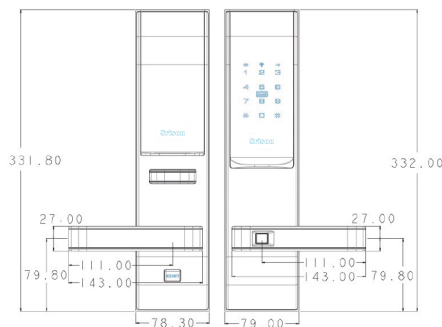

Features

- Multiple Access Function: RFID Card, User PIN Code, Fingerprint.
- Multiple Pin code broken protection functions: Radom Pin Code, Scramble Fake Mode
- Wake-up With Touching
- Voice Guide
- Auto Lock Selector (Can switched to enable / disable)
- Low battery alert
- Emergency External DC 9V Power Supply
- Mechanical key override failsafe
- Exterior lever lift and lock deadbolt
- US Heavy duty lock body design
- ANSI G1 and 3 Hours fire rating compliance

Product Code

SR01 0 0S 41-45 CM

Cylinder
CM \ CX

Door Thickness

45 : Door Thickness 45~55mm

55 : Door Thickness 55~55mm

65 : Door Thickness 65~75mm

75 : Door Thickness 75~85mm

85 : Door Thickness 85~95mm

Function Type

31 : Mifaae Card, User Pin Code, Key

41 : Mifaae Card, User Pin Code, Fingerprint

Metal Finish

0S : Silver (SN)

Handle Type

0 : Type 0

Lock Type

PMX-US Mortise Electric Lock

Specification

- RFID : 13.56MHz Mifare Standard
- Memory :

RFID Card:60 sets

User Pin Code:60 sets

Single-entry User Code:3 sets

Fingerprint : 30 sets

- Fingerprint Sensor : Capacitive
- RFID Card : Mifare 13.56MHz
- Pin code : Invisible Touch keypad
- Pin length : 4~8 digits
- Power : 1.5V(AA) x 4
- Material : Zinc Alloy
- Color : US15
- Working temperature: -20°C ~ 70°C
- Working Humidity:30% ~ 90%
- IP Protection: IP54
- Dimension

67mm x 23mm x 133mm for exterior trim.


73mm x 28mm x 189mm for interior trim.

Mortise

- Lock Case : ANSI Grade 1 US Mortise
- Door thickness : 45mm~95mm
- Backset: 70mm
- Center to Center: 98mm

Pinch


- Material : Stainless steel
- Dimension : 148mm(L) x 32mm(W) x 25mm(T)



Cylinder



Stander

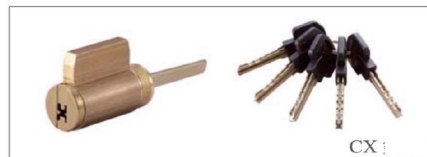

Option

5 pins, Kwikset keyway standard.

